

# TORINO 10W Adjustable Downlight

3000K 750lm



**PRELUX**  
LED PRODUCTS

Product Code: PXTOR10W3K



## Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam Angle	CCT	Lifespan	CRI	Dimensions
10W	AC100-240V	10W	≥0.9	750	38° 60°	3000K	40000h	≥80	L110*W110*H63mm cutout L90*W90mm



## Driver Data Sheet

Driver Data	Non-dim
Input Rated Voltage	AC100-240V
Frequency	50/60Hz
Input Voltage	AC85-265V
Efficiency	≥86%
Total Load Wattage	10W±1W
Power Factor	≥0.9
Rated Input Current	≤0.12A
Full Load Output Voltage	DC35-40V
Rated Output Current	240mA
Output Current Range	240mA±5%
Power Tolerance	±5%
Current Output Tolerance	±5%
Dimming Range	-
Dimmer	-
Short Circuit Protection	PASS
Over Voltage Protection	PASS
Over Temperature Protection	PASS
Withstand Voltage	AC3750V

## Fixture Compatibility

Rated Wattage	10W
Electrical Classification	II
Ingress Protection	IP20
Operating Temperature	-20°C~45°C
Operating Humidity	0~90%
Storage Temperature	-20°C~65°C

## Beam Angle

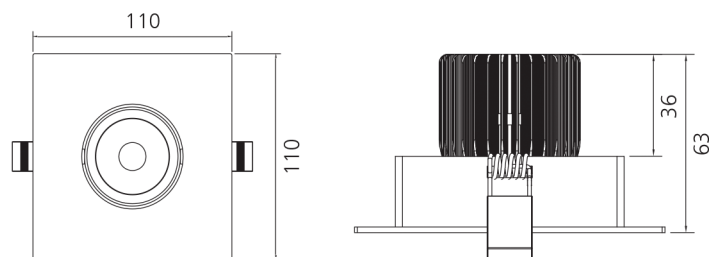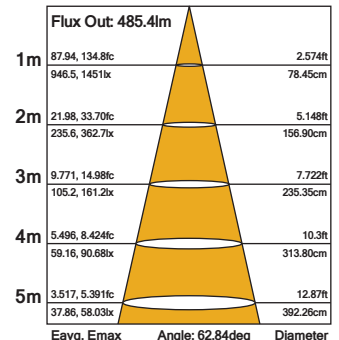

The Prelux Torino 10W rectangular LED recessed light is uniquely designed with a COB high power LED chip. The anti-glare lens with COB LED provides excellent lighting effect without glare and shadow. Single head and double head provided for wide choice. Adjustable lighting direction offers various lighting orientation.

- Environment friendly, no Mercury or other hazardous substances
- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- 38° 60° wide beam angle
- L90\*W90mm cutout
- CCT: 3000K
- Adjustable and rotary
- No UV/IR light