
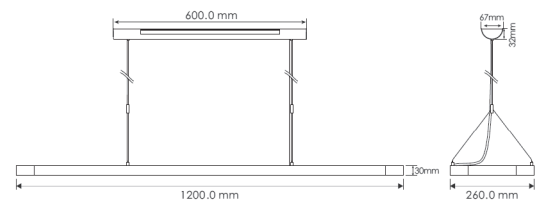


## Maye R Datasheet

20W Up / 40W Down Linear LED Pendant

PXMAYE-R

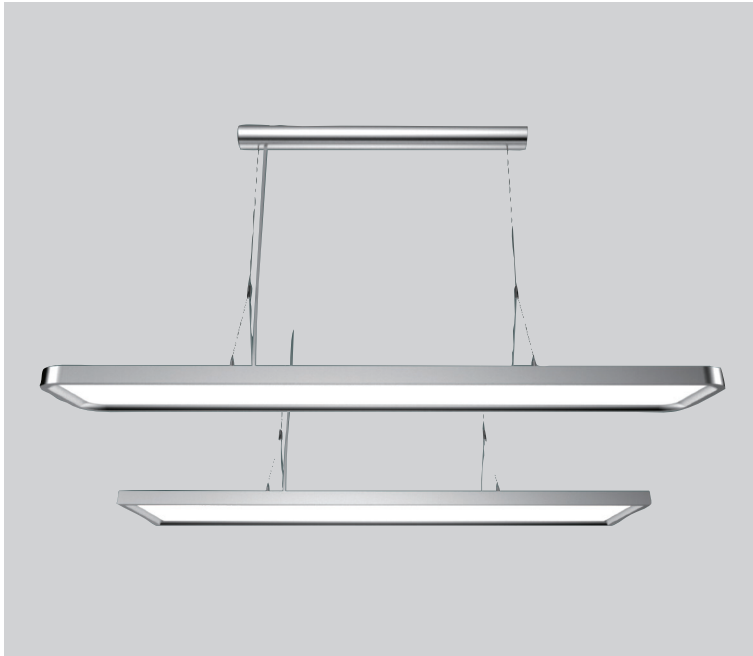

<b>Dimensions</b>	1200*260*30mm
<b>Input Voltage</b>	AC100~240V/AC220~240V
<b>Input Power</b>	↑ 20W Up ↓ 40W Down
<b>Power Factor</b>	≥0.9
<b>Housing Color</b>	Silver/White
<b>Luminous Flux</b>	↑ 1700lm Up ↓ 3400lm Down
<b>Color Rendering Index</b>	>80
<b>Life Time</b>	50,000H
<b>Fixture Material</b>	6063AL
<b>CCT</b>	4000K
<b>LEDs</b>	240pcs
<b>Protection Level</b>	IP 20
<b>Storage Temperature</b>	-40°C~+80°C
<b>Working Temperature</b>	-20°C~+45°C
<b>UGR</b>	<19
<b>Dimmable</b>	No
<b>Luminous Efficacy</b>	90lm/W
<b>Warranty</b>	5 Years

### Features & Applications

The Prelux Maye Up/Down Pendant is beautifully designed with a sleek finish that complements a range of commercial and architectural spaces.

The rounded rectangular frame is crafted from high quality aluminium which provides excellent thermal performance, greatly contributing to the long 50,000 hour lifetime of the LEDs.

Maye provides a soft even glow with a UGR of <19. The 20W upright works in perfect tandem with the 40W downlight to create a unique atmospheric light, making it ideal for public buildings such as libraries, schools and hospitals as well as retail stores and commercial offices.