


## Oslo Slim Emergency Datasheet

14W 1250Lm LED Bulkhead / Ceiling Light

PXOSSEM

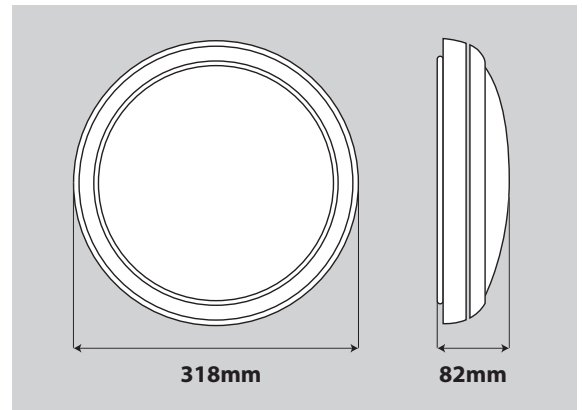

### Standard Specifications

- Polycarbonate & ABS Body
- Screwless Twist & Lock Cover
- Colour Temperature Adjustable
- IP54 Protection Rating
- 35,000 Hour Lifetime
- 180-240V 50/60Hz
- 140pcs SMD LED
- 120° Beam Angle
- CRI >80

### Emergency

- Battery Type LiFePO4
- 3-4 Hours @ 2-3W



RoHS

IP54

LED

14W

<b>Dimensions</b>	318*318*82mm
<b>Input Voltage</b>	180~240V 50/60Hz
<b>Input Power</b>	14W
<b>Power Factor</b>	≥0.5
<b>Beam Angle</b>	120°
<b>Housing Color</b>	White
<b>Luminous Flux</b>	1100Lm (WW), 1250lm (CW), 1200Lm (DL)
<b>Color Rendering Index</b>	>80
<b>Lifetime</b>	35,000Hrs
<b>Fixture Material</b>	PC & ABS
<b>CCT</b>	3000K / 4000K / 6000K
<b>LEDs</b>	140pcs SMD
<b>Protection Level</b>	IP54
<b>Storage Temperature</b>	0°C~+25°C
<b>Working Temperature</b>	-20°C~+45°C
<b>Dimmable</b>	No
<b>Luminous Efficacy</b>	90lm/W
<b>Certification</b>	CE
<b>Warranty</b>	3 Years

### Features & Applications

At just 82mm in depth, the Prelux Oslo Slim is almost 20% thinner than the previous model. The compact body coupled with the screwless Twist & Lock cover also makes the Oslo Slim a more aesthetically pleasing choice for functional bulkhead lighting.

The Oslo Slim comes with the choice of 3 colour temperatures: warm, cool and daylight which offers even greater flexibility.

The IP54 protection rating also makes it suitable for a broad range of applications, including corridors, stairwells and toilet facilities.