


Oslo Slim Emergency Microwave

14W 1250Lm LED Bulkhead / Ceiling Light

PXOSSMWEM

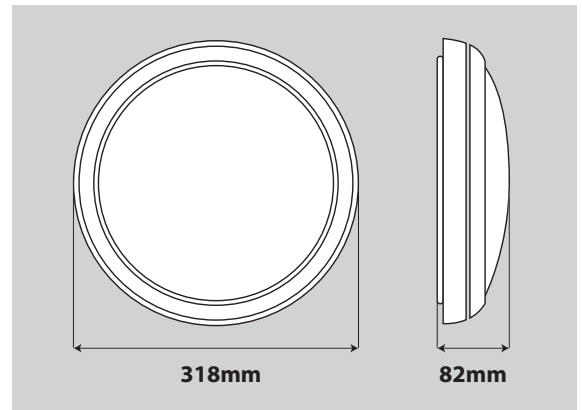

Standard Specifications

- Polycarbonate & ABS Body
- Screwless Twist & Lock Cover
- Colour Temperature Adjustable
Warm/Cool/Daylight Options
- IP54 Protection Rating
- 35,000 Hour Lifetime
- 180-240V 50/60Hz
- 140pcs SMD LED
- 120° Beam Angle
- CRI >80

Microwave

- Detection Range 10m(W) x 6m(H)
- Detection Angle 30° ~ 150°
- Hold Time 5s / 90s / 5Min / 15Min
- Stand-by Power <0.5W

Emergency

- Battery Type LiFePO4
- 3-4 Hours @ 2-3W



RoHS

IP54

LED

14W

Dimensions	318*318*82mm
Input Voltage	180~240V 50/60Hz
Input Power	14W
Power Factor	≥0.5
Beam Angle	120°
Housing Color	White
Luminous Flux	1100Lm (WW), 1250lm (CW), 1200Lm (DL)
Color Rendering Index	>80
Lifetime	35,000Hrs
Fixture Material	PC & ABS
CCT	3000K / 4000K / 6000K
LEDs	140pcs SMD
Protection Level	IP54
Storage Temperature	0°C ~ +25°C
Working Temperature	-20°C ~ +45°C
Dimmable	No
Luminous Efficacy	90lm/W
Certification	CE
Warranty	3 Years

Features & Applications

At just 82mm in depth, the Prelux Oslo Slim is almost 20% thinner than the previous model. The compact body coupled with the screwless Twist & Lock cover also makes the Oslo Slim a more aesthetically pleasing choice for functional bulkhead lighting.

The Oslo Slim comes with the choice of 3 colour temperatures: warm, cool and daylight which offers even greater flexibility.

The IP54 protection rating also makes it suitable for a broad range of applications, including corridors, stairwells and toilet facilities.