


## Oslo Slim Microwave Datasheet

14W 1250Lm LED Bulkhead / Ceiling Light

PXOSSMW

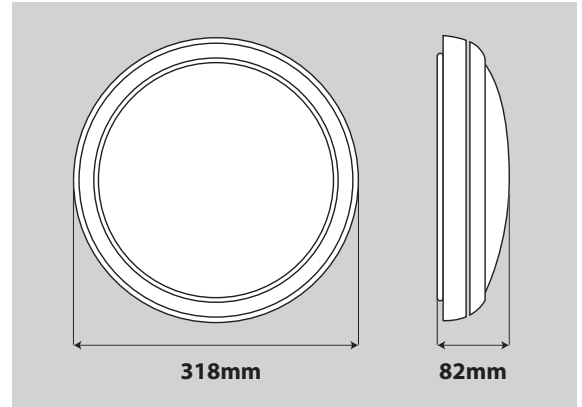

### Standard Specifications

- Polycarbonate & ABS Body
- Screwless Twist & Lock Cover
- Colour Temperature Adjustable
- IP54 Protection Rating
- 35,000 Hour Lifetime
- 180-240V 50/60Hz
- 140pcs SMD LED
- 120° Beam Angle
- CRI >80

### Microwave

- Detection Range 10m(W) x 6m(H)
- Detection Angle 30° ~ 150°
- Hold Time 5s / 90s / 5Min / 15Min
- Stand-by Power <0.5W



RoHS

IP54

LED

14W

|                              |                                       |
|------------------------------|---------------------------------------|
| <b>Dimensions</b>            | 318*318*82mm                          |
| <b>Input Voltage</b>         | 180~240V 50/60Hz                      |
| <b>Input Power</b>           | 14W                                   |
| <b>Power Factor</b>          | ≥0.5                                  |
| <b>Beam Angle</b>            | 120°                                  |
| <b>Housing Color</b>         | White                                 |
| <b>Luminous Flux</b>         | 1100Lm (WW), 1250lm (CW), 1200Lm (DL) |
| <b>Color Rendering Index</b> | >80                                   |
| <b>Lifetime</b>              | 35,000Hrs                             |
| <b>Fixture Material</b>      | PC & ABS                              |
| <b>CCT</b>                   | 3000K / 4000K / 6000K                 |
| <b>LEDs</b>                  | 140pcs SMD                            |
| <b>Protection Level</b>      | IP54                                  |
| <b>Storage Temperature</b>   | 0°C ~ +25°C                           |
| <b>Working Temperature</b>   | -20°C ~ +45°C                         |
| <b>Dimmable</b>              | No                                    |
| <b>Luminous Efficacy</b>     | 90lm/W                                |
| <b>Certification</b>         | CE                                    |
| <b>Warranty</b>              | 3 Years                               |

### Features & Applications

At just 82mm in depth, the Prelux Oslo Slim is almost 20% thinner than the previous model. The compact body coupled with the screwless Twist & Lock cover also makes the Oslo Slim a more aesthetically pleasing choice for functional bulkhead lighting.

The Oslo Slim comes with the choice of 3 colour temperatures: warm, cool and daylight which offers even greater flexibility.

The IP54 protection rating also makes it suitable for a broad range of applications, including corridors, stairwells and toilet facilities.